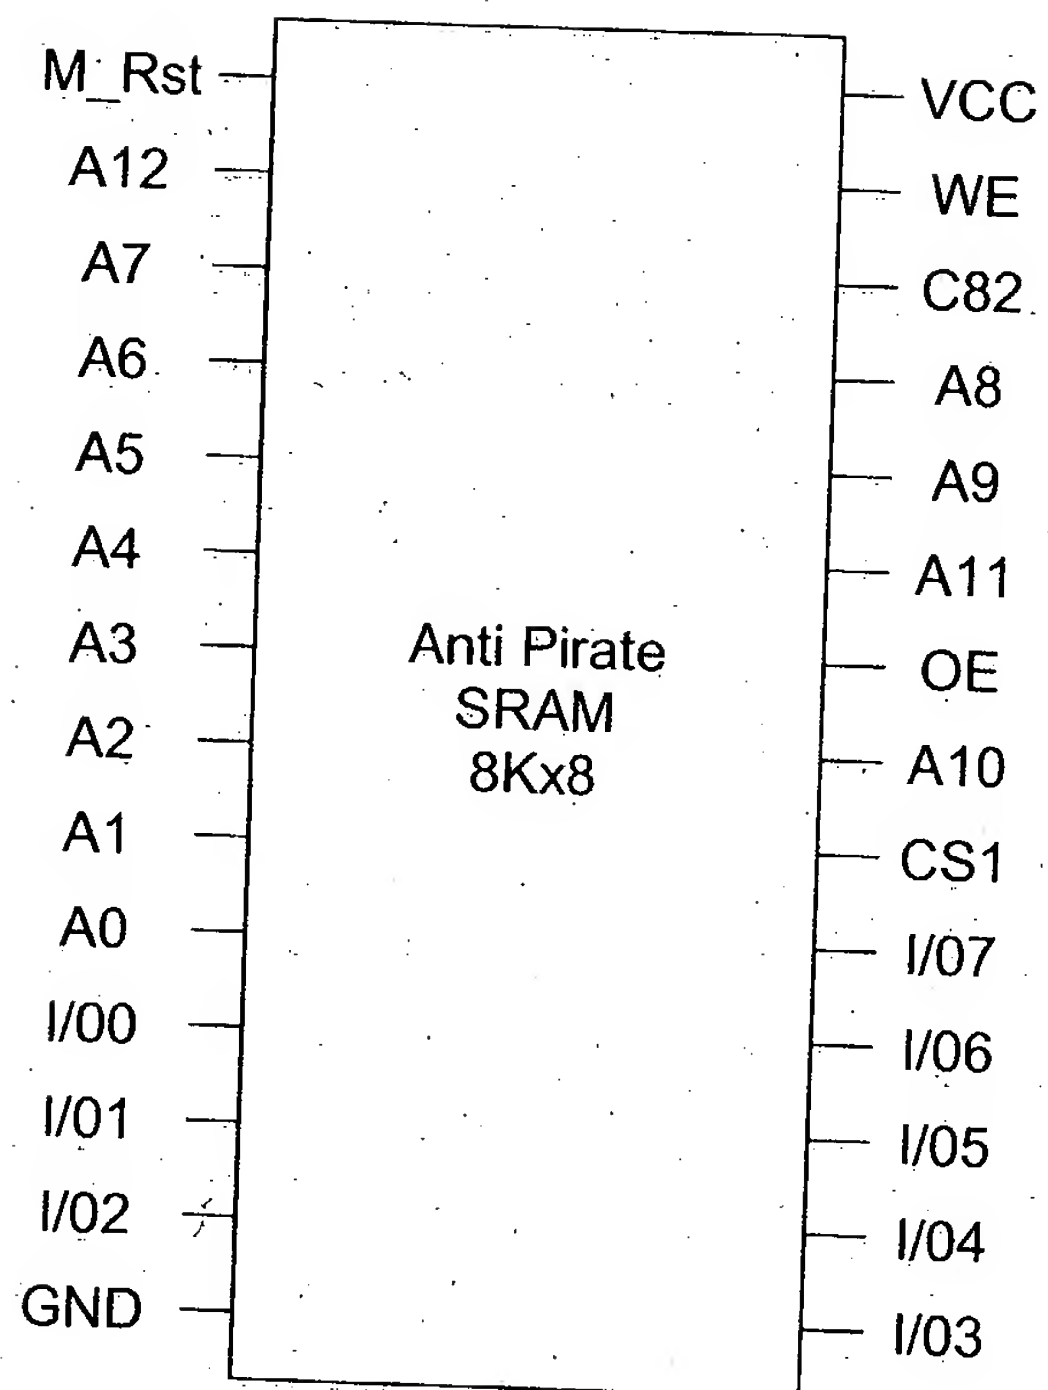


Fig. 1

*Fig. 2*


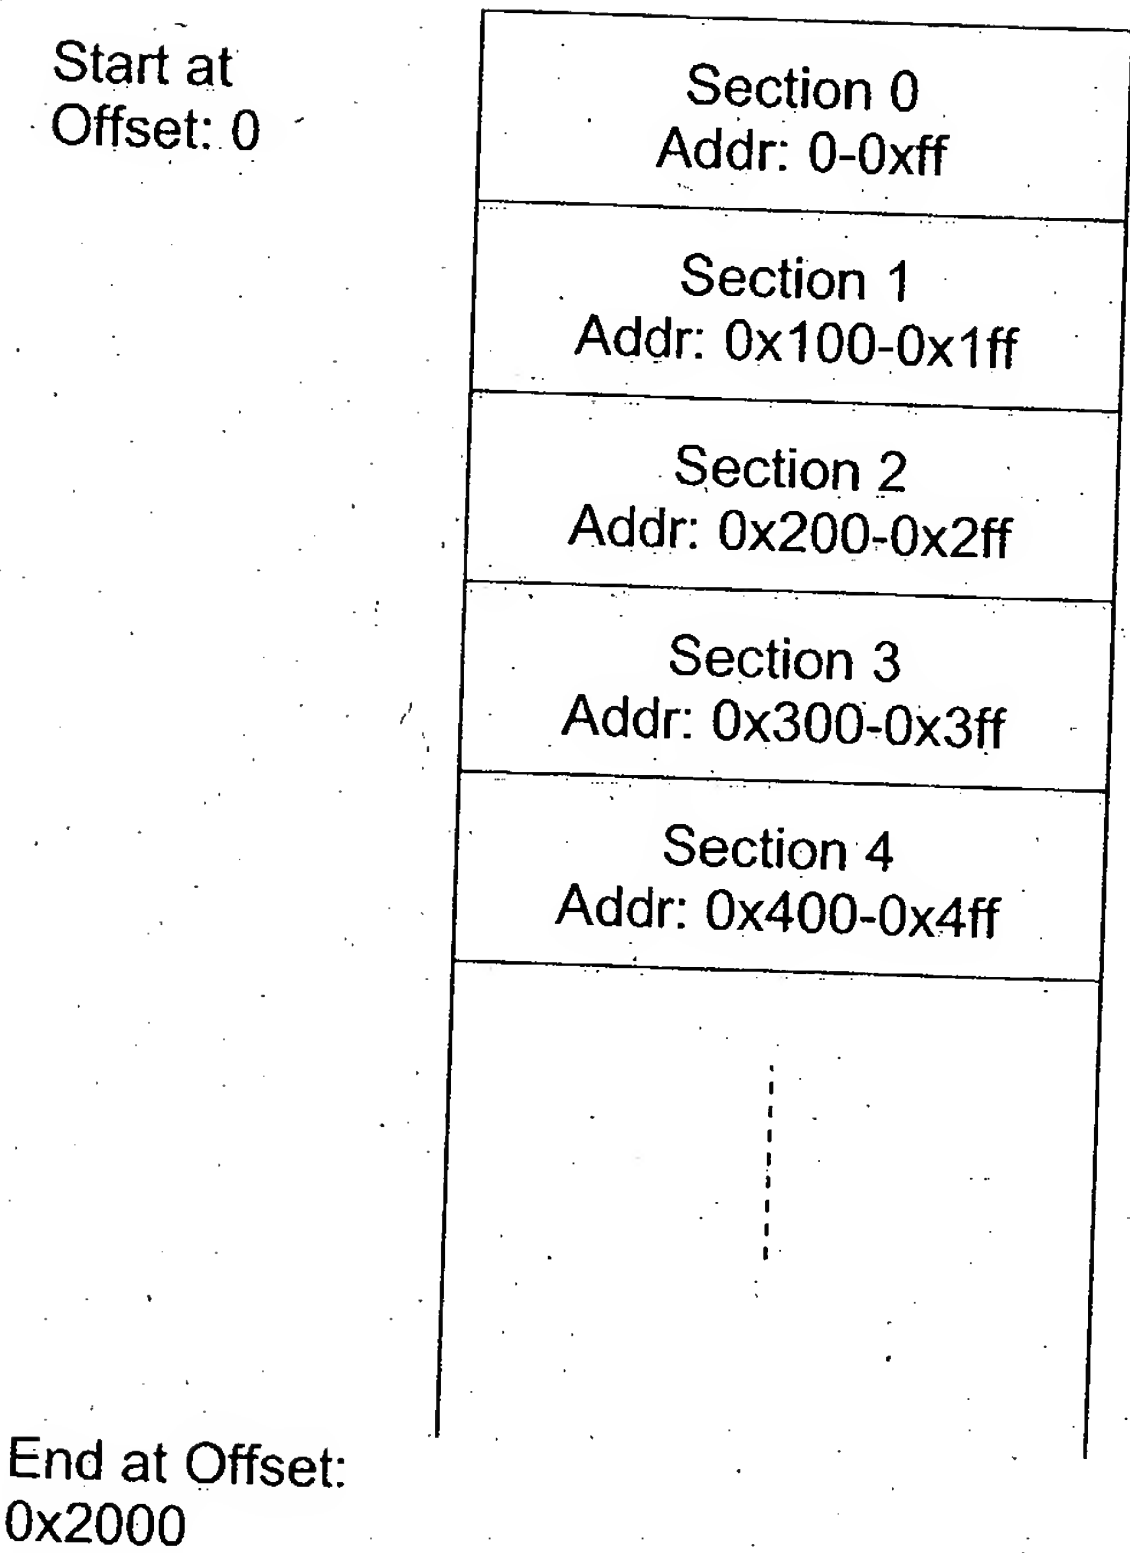


Fig. 3

Start at Offset: 00

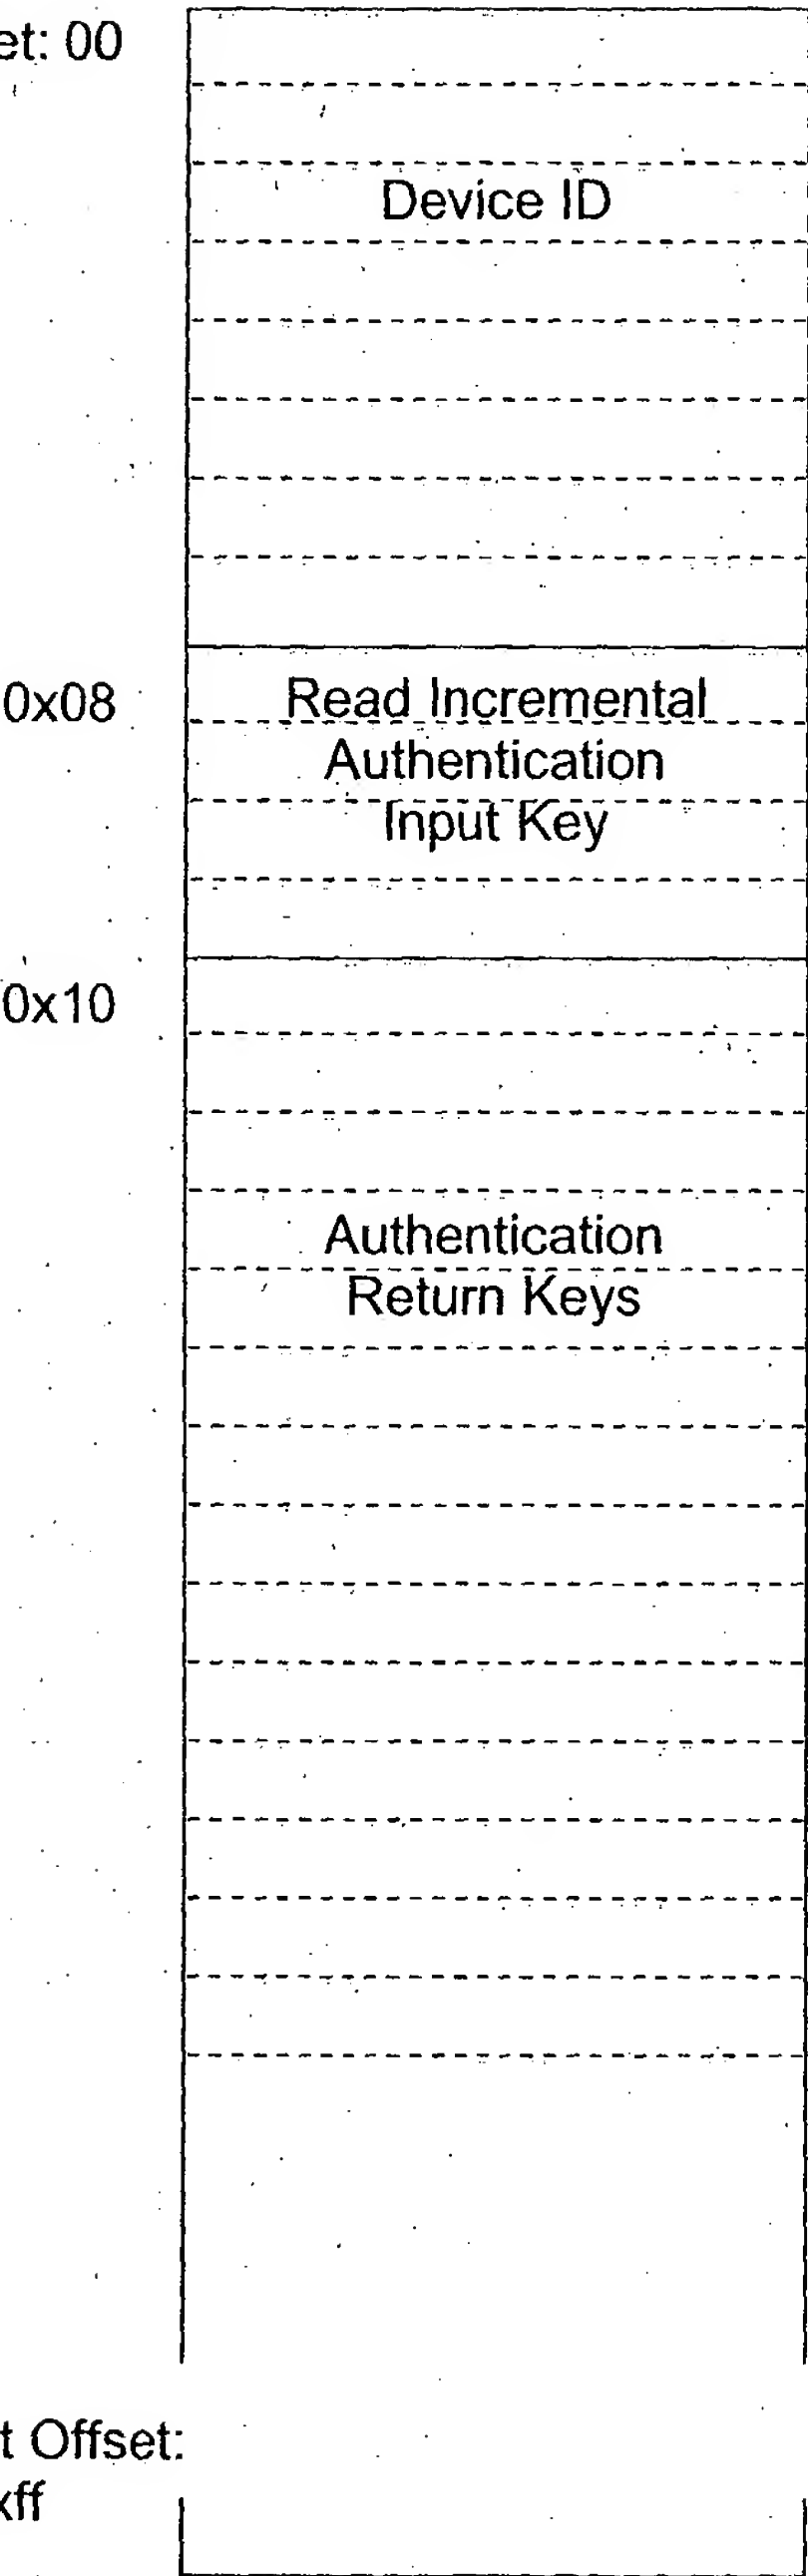


Manufacture defined device ID.
It's value should be fixed when section is in authentication mode

Valid Value range from 0 to 1023
This field's value increments when the lowest byte being read.

Authentication return keys
Function of Authentication input key, memory address (not offset within section but offset from begin of this device) and Secret Authentication Key

...End at Offset:
0xff

Fig. 4

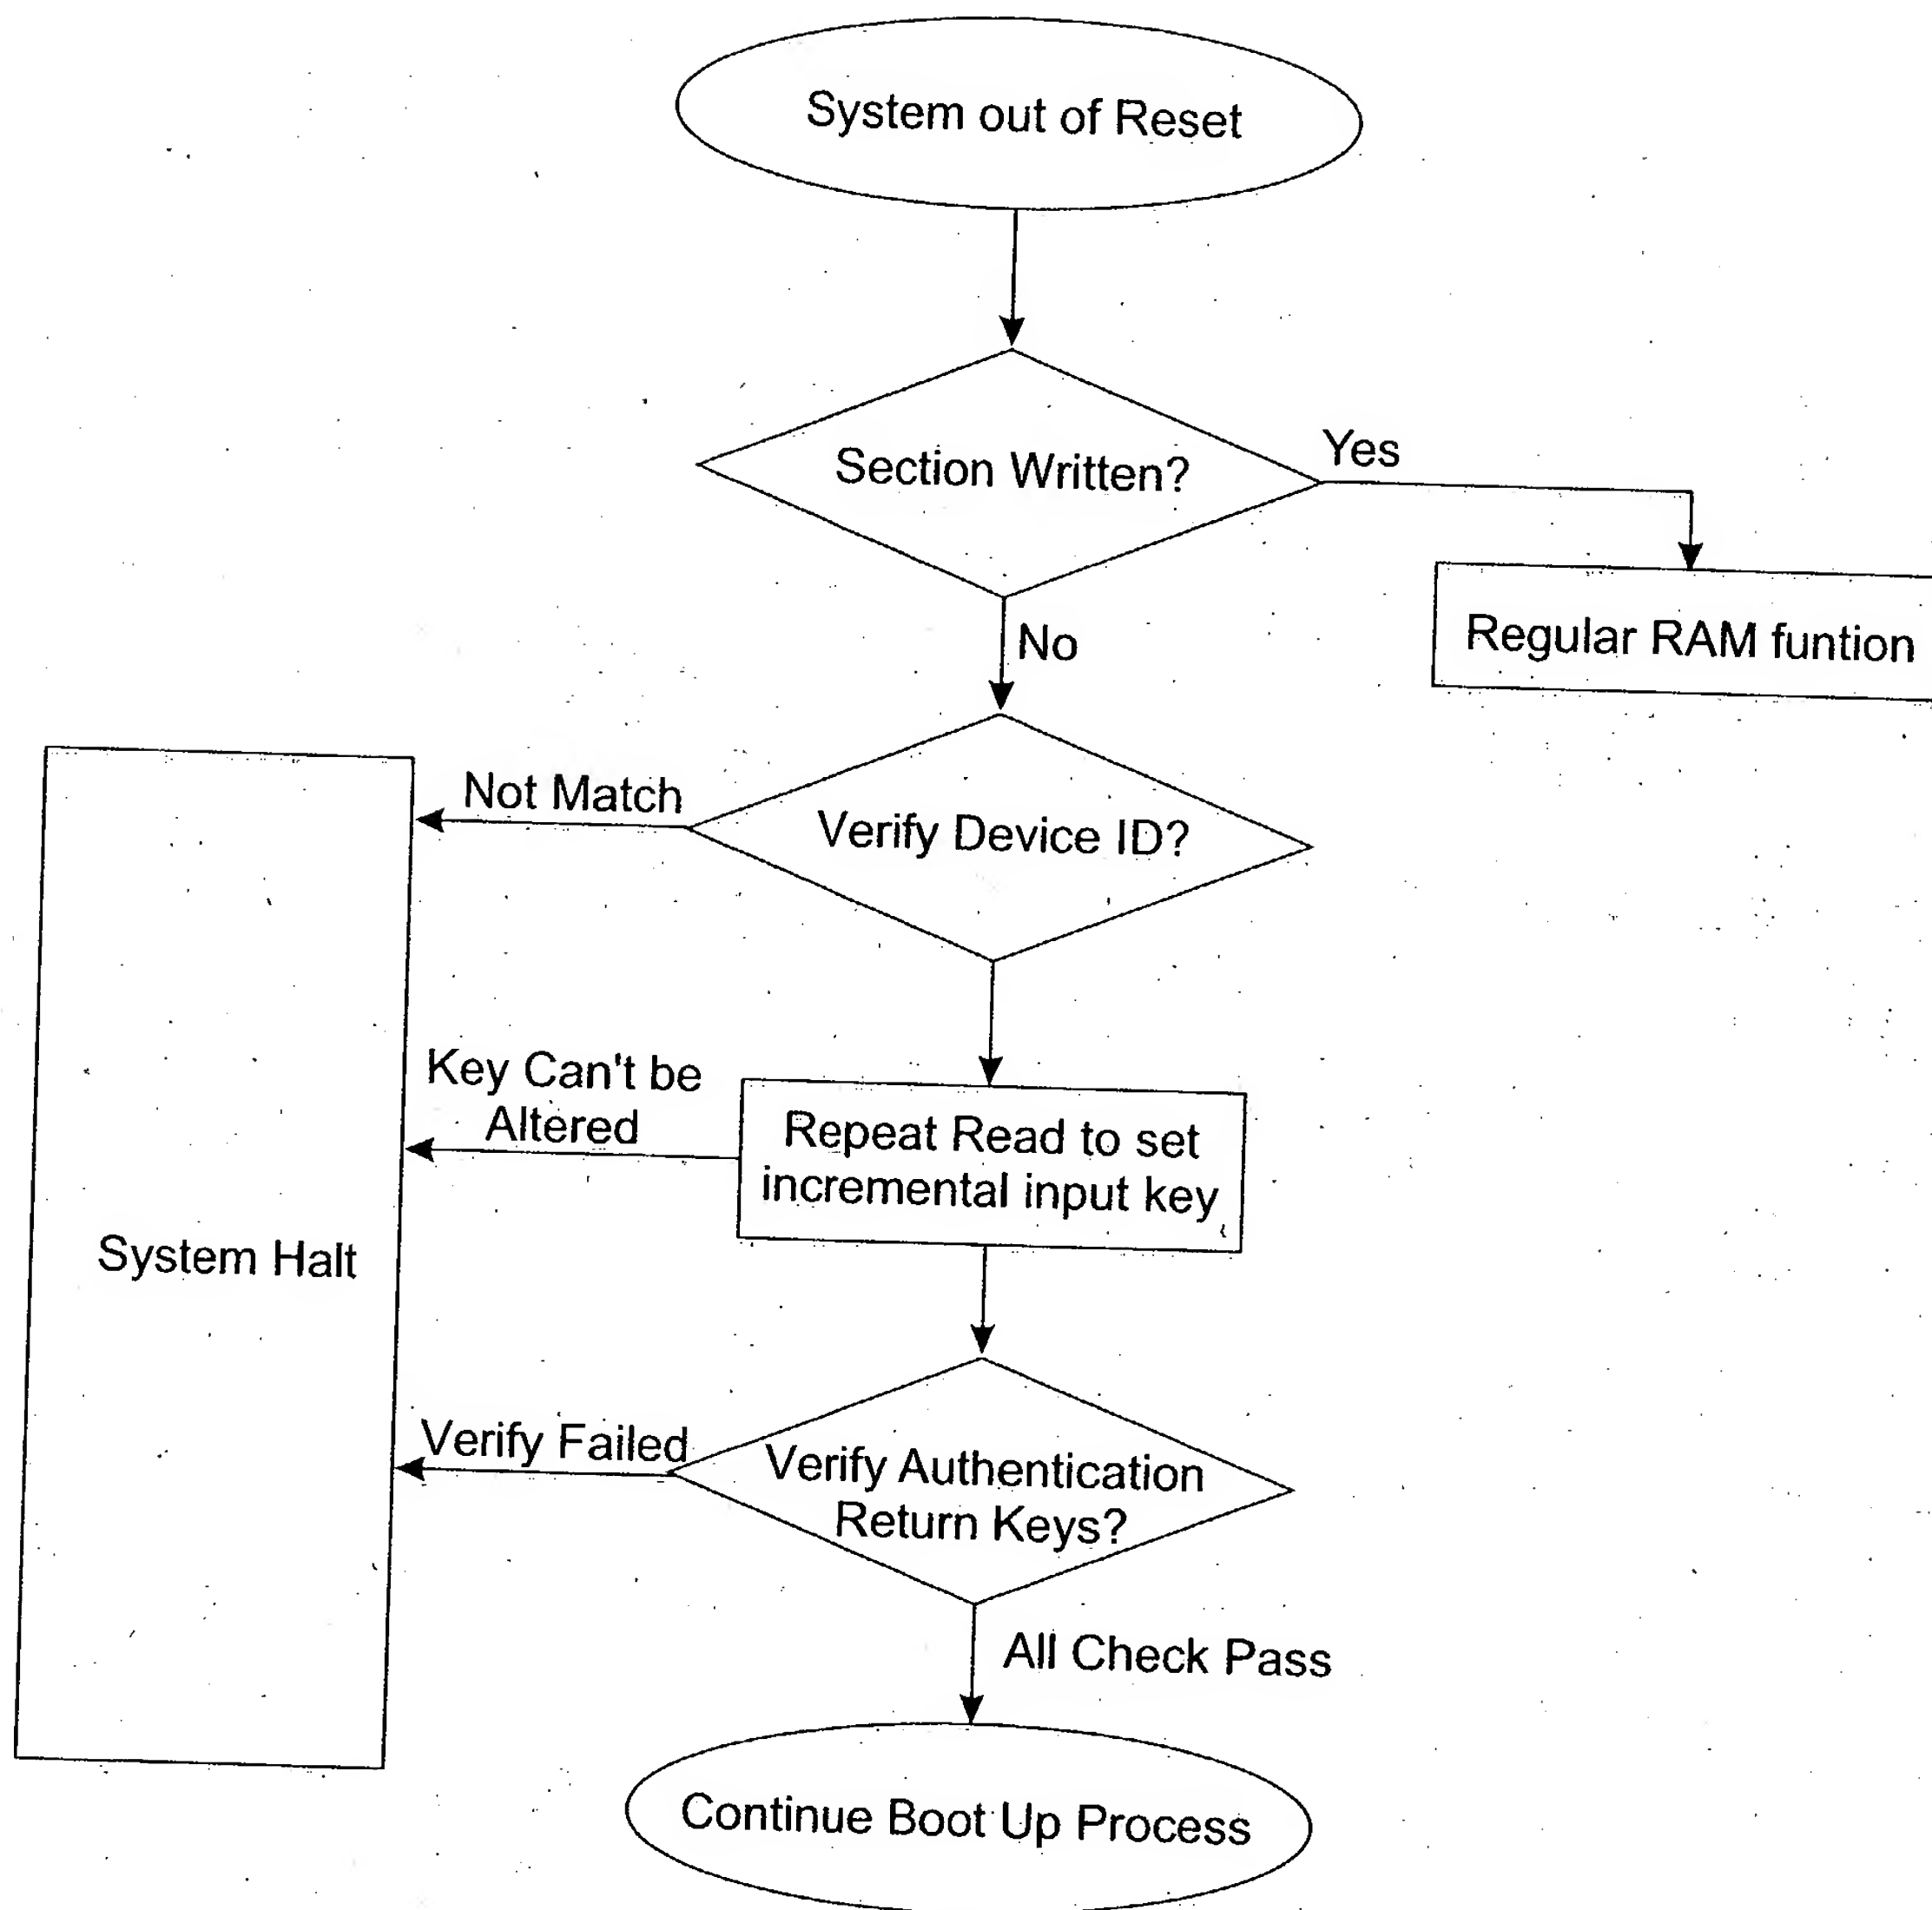*Fig. 5*